


**SnapMate Sleeve actuated Connection Tool for; -4 [7/16-20] 45deg Flare refrigeration access port, 625psi pressure, -4 (7/16-20) 45deg Flare Male termination, SS, Brass construction with Neoprene seal materials.**

**SKU:** SCTA07H

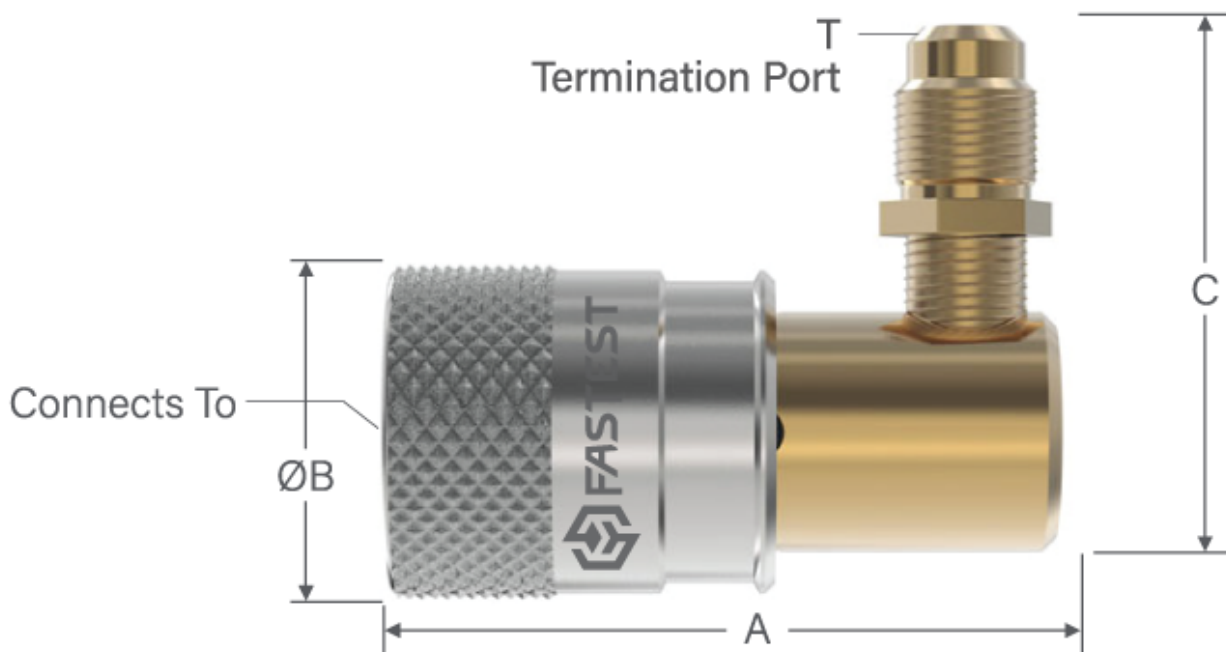

**Actuation:** Sleeve

**Pressure Rating:** 43.1bar (625psi)

**Vacuum Rating:** 250millitorr

**Leak Rate Capability:** 1E-3cc/s He

**Connection / Application Method:** Manual

**Grip Method:** Thread Collets

**Valved / Not Valved:** Valved



**Dim A:** 48.3mm (1.90in)

**Dim B:** 23.6mm (0.93in)

**Dim C:** 38.3mm (1.51in)

**Termination Port (T):** -4 (7/16-20) 45deg Flare

**Max Termination Torque:** 11N-m (8ft-lbs)