




FX Thumb Valve actuated Connection Tool for: -4 [7/16-20] 45deg flare, 5000psi (344.5bar) pressure, 1/4 NPT Female termination, SS, Anodized Aluminum construction with Buna-N seal materials.

SKU: FXV04A041

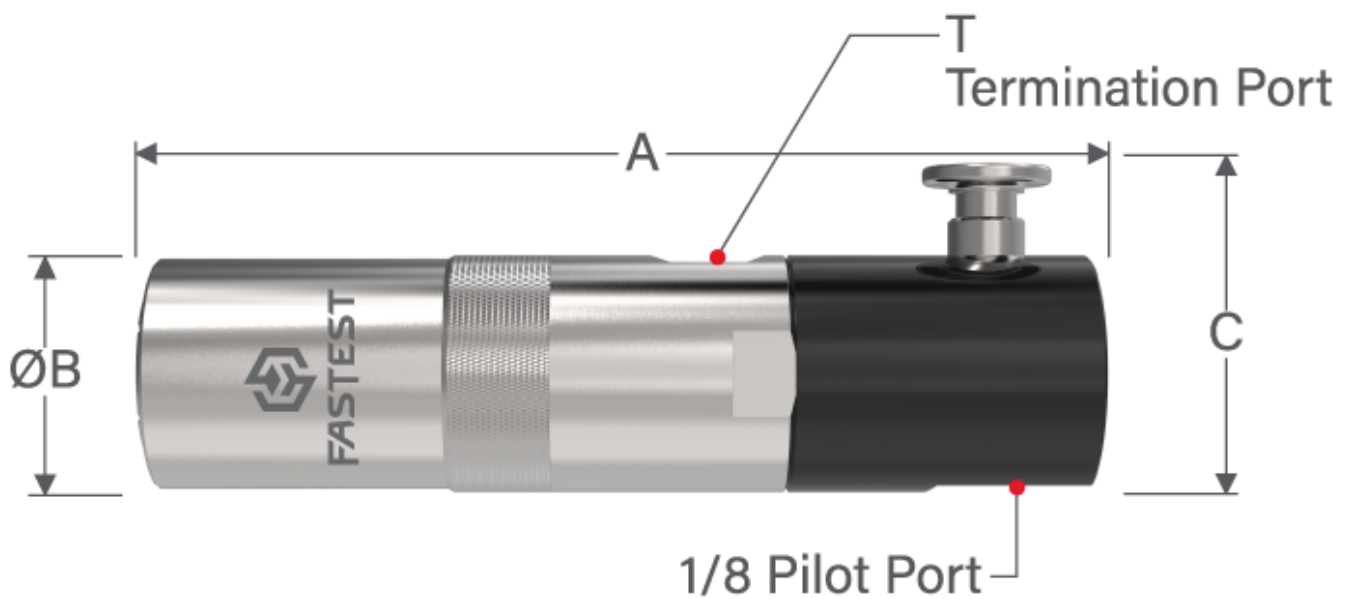

Actuation: Thumb Valve

Pressure Rating: 344.5bar (5000psi)

Vacuum Rating: Vacuum

Leak Rate Capability: 1E-5cc/s He

Connection / Application Method: Manual

Grip Method: Threaded / Grip Collets

Dim A: 128.02mm (5.04in)



Dim B: 32mm (1.26in)

Dim C: 44.96mm (1.77in)

Termination Port (T): 1/4 NPT

Pilot Pressure: 8.268bar (120psi)

Max Termination Torque: 28N-m (21ft-lbs)