




FX Thumb Valve actuated Connection Tool for: -8 [3/4-16] 45deg flare, 5000psi (344.5bar) pressure, 3/8 NPT Female termination, SS, Anodized Aluminum construction with Buna-N seal materials.

SKU: FXV08A061

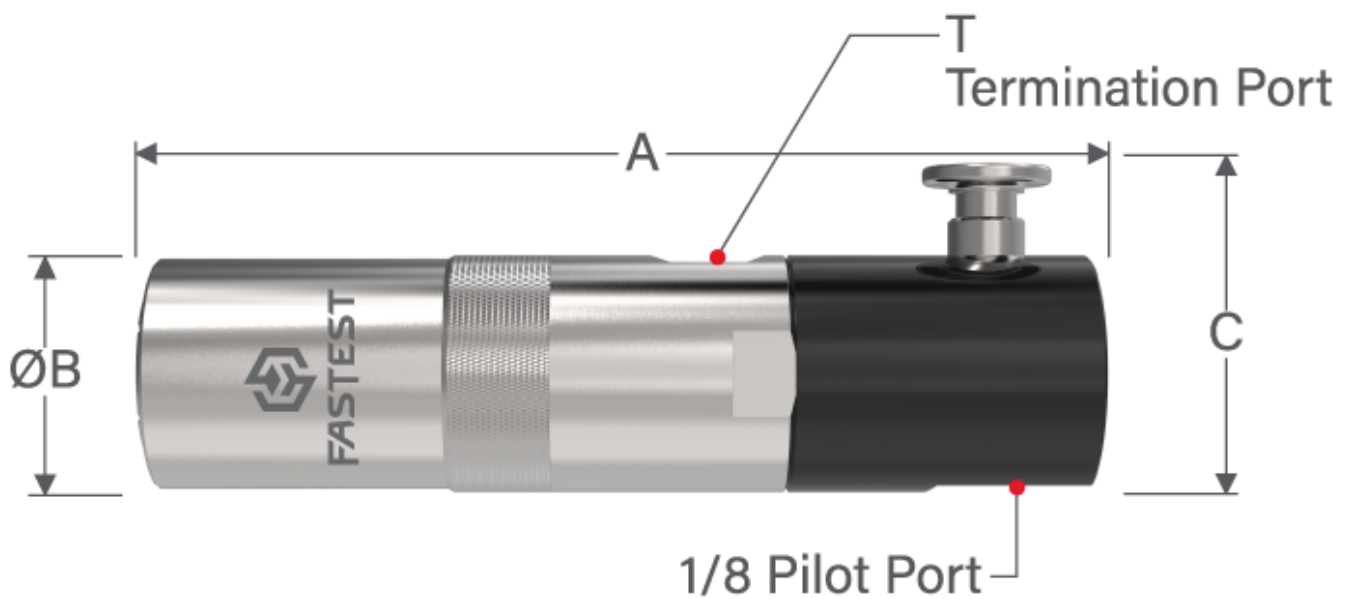

Actuation: Thumb Valve

Pressure Rating: 344.5bar (5000psi)

Vacuum Rating: Vacuum

Leak Rate Capability: 1E-5cc/s He

Connection / Application Method: Manual

Grip Method: Threaded / Grip Collets

Dim A: 132.59mm (5.22in)



Dim B: 37.59mm (1.48in)

Dim C: 47.5mm (1.87in)

Termination Port (T): 3/8 NPT

Pilot Pressure: 8.268bar (120psi)

Max Termination Torque: 38N-m (28ft-lbs)